

TECHNICAL DATA SHEET – OPENWELL



The self-cleaning mat is made of flexible PVC waves riveted to aluminium strips. The waves spring underneath a person and therefore automatically clean their shoes. A suitable length should be selected so that the visitor takes 3-5 steps over the mat.


The mat is NOT SELF-SUPPORTING, it must lie entirely on a flat surface!

This is the only mat intended for double-sided use. We recommend following this mat with a SHATWELL textile mat - this way you achieve the complete shoe cleaning experience. Not suitable for going over with shopping carts and pallet trucks.



The Openwell mat can be supplied with a flame retardant PVC bellows. It is suitable for use in escape routes and is certified to EN 13501-1 + A1:2010.

Fire reaction classification: Bfl-s1.

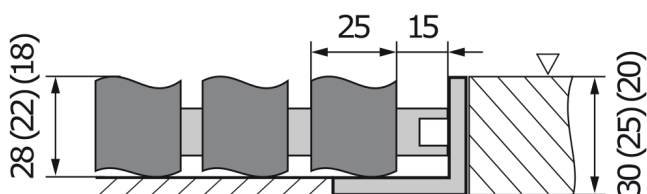

Technical parameters

Design:	aluminium, black anodized aluminium
Dimensions:	according to the client's requirements
Height:	28/22/18 mm
Weight:	10 kg/m ²
Installation:	at floor level in prepared holes fitted with a 30 × 30 × 3 mm, 25 × 25 × 3 mm, 20 × 30 × 3 mm aluminium frame/30 × 30 × 3 mm, 25 × 25 × 3 mm, 20 × 20 × 3 mm stainless steel frame, or freely placed on the floor in a 45 mm (up to 120 cm) or 65 mm aluminium frame
Resistance:	not suitable for going over with vehicles and pallet trucks
Use:	entrance areas to hotels, banks, restaurants, office buildings, as well as family homes

